
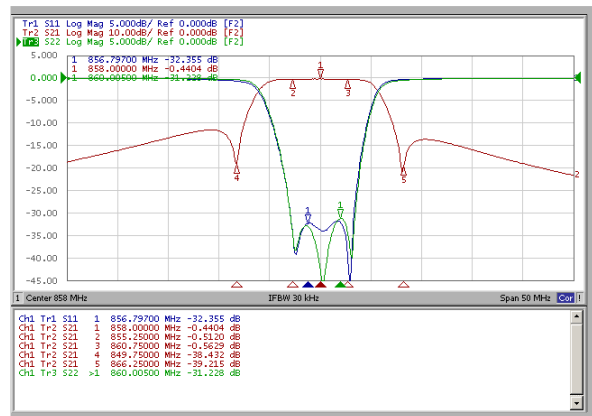


DVB-T(Digital Video Broadcasting - Terrestrial) BPF(3Cavity+2Notch)

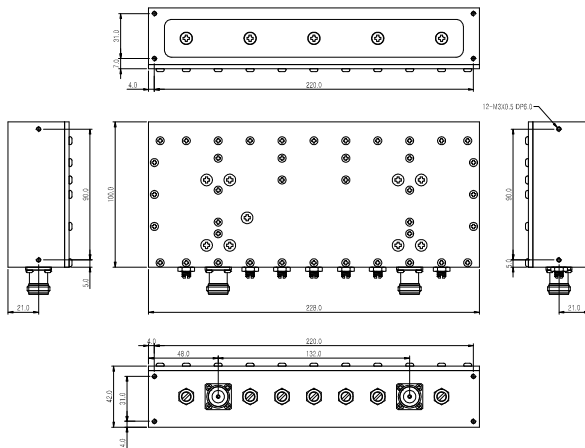

Item		Specifications
Frequency Range		470 ~ 862MHz
Insertion Loss(Max.)	$f_0 \pm 2.75\text{MHz} (@F_v, @F_s)$	0.70dB
Return Loss (Min.)		25dB
2 nd harmonic Rejection (Min.)		50dB
Attenuation (Min.)	$F_c \pm 8.25\text{MHz}$ $(@F_v-5.5\text{MHz}, @F_s+5.5\text{MHz})$	30dB
Group Delay (Max.)		100ns
Power Rating (Ave.)		120W
In/Out Port		N – Female
Temperature Range		-10 ~ +50
Size (W x D x H) (mm)		228.0 x 100.0 x 42.0
Weight (Max.)		1.5Kg