
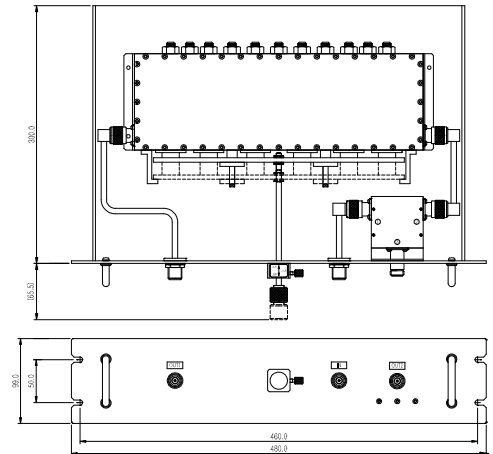



# ANTENNA SWITCH

## FEATURES


- Hot Switching
- For indoor application
- Manual Switching

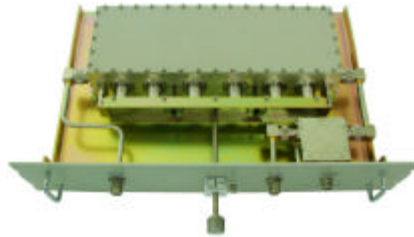

Item	Specifications	
Frequency Range	470 ~ 578MHz	
Insertion Loss (Max)	NS	0.55dB
	SS OUT1-Open	
	SS OUT1-Term	
Ripple (Max.)	NS	0.2dB
	SS OUT1-Open	
	SS OUT1-Term	
Return Loss (Min.)	NS	17.7dB
	SS OUT1-Open	
	SS OUT1-Term	
Isolation (Min.)	NS OUT2	18dB
	SS OUT1	
Group Delay (Max.)	NS	20ns
	SS OUT1-Open	
	SS OUT1-Term	
Operation Power	300W	
Temperature Range	-10 ~ +50	
Size (W x D x H) (mm)	480.0 x 300.0 x 99.0	
In/Out Port	N - Female	
NOTE : NS-> Normal State, SS-> Switching State		

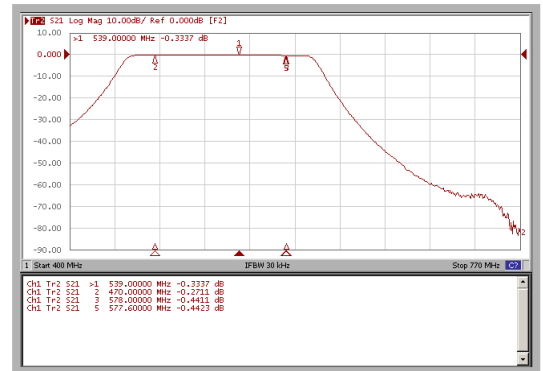

Insertion Loss(NS)

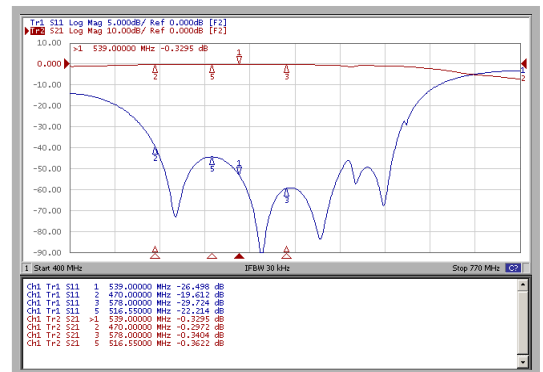

Insertion Loss(SS)